


Specifications	PDR-M3000 Series		PDR-M5000 Series	
	PDR-M3008	PDR-M3016	PDR-M5008	PDR-M5016
Compression	MPEG 2		MPEG 4	
Operating System	Embedded Linux			
Video Input/ Loop out	8 / 8	16 / 16	8 / 8	16 / 16
Video Output	1 Composite, 1 S-Video, 1 VGA, 1 SPOT-OUT			
Audio In/ Out	8 / 1		8 / 1	16 / 1
Live Display Resolution	NTSC 720 480, PAL 720 576			
Alarm In/Relay Out	8 / 4	16 / 4	8 / 4	16 / 4
External Recording Devices	Disk Raid, HDD, CD-RW, DVD-RW(- type), Flash Memory Stick			
Communication Port	RS-232C, RS-422, Ethernet(10/100 Base-T), USB 2.0			
Storage Media	Upto 3 INTERNAL HDDS + CD-RW, DVD-RW, or Removable HDD(option)			
Network Interface	Ethernet(RJ-45, 10/100 base-Tx), External Modem via RS-232C port			

General

Power	AC 100~240V(Free Voltage), 50/60 Hz
Power Consumption	82Watt
Operation Temperature	0 ~40
Dimension / Weight	430(W) x 450(D) x 100(H) / 8.7 Kg

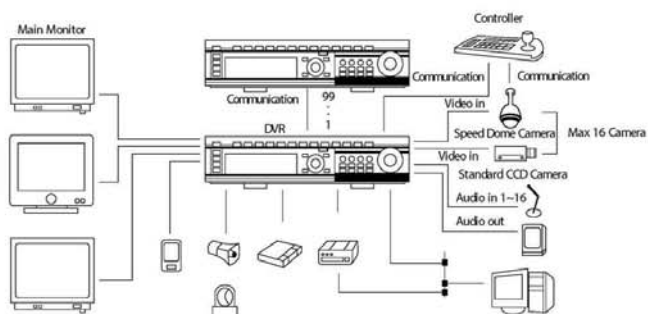

Distributed By

LAKSON PTE. LTD.
 10, Jalan Besar
 Sim Lim Tower
 #02-43
 Singapore 208787
 Tel : (65) 6296 7185
 Fax : (65) 6844 8392
 Website : www.lakson.com.sg



M 3000 Series / M 5000 Series

